

TRIMMING PRESS 사양 (400⁺ (VORONЕЖI)

Single-crank single action presses

Basic specifications	Value		
	KA9536	K9538	KA9540
Nominal force, kN	4000	6300	10000
Slide stroke, mm	400	400	500
Number of slide strokes per minute	25	20	20
Shut height (distance between bed and slide when in down position and Adjustment up), mm	470	570	680
Adjustment stroke, mm	160	180	200
Bed dimensions, mm	1000x1000	1250x1250	1250x1250
Dimensions of opening in bed, mm	630x630	800x800	1000x1000
Slide dimensions, mm	800x800	1000x1000	1250x1250
Bolster plate thickness, mm	160	180	260
Main drive motor power, kW	40	61	75
Overall dimensions, mm:			
floor space	3410x3140	3600x3470	4310x3820
height above floor level	5940	6190	6790
Mass, t, approx	32,7	49,8	79.5



МОДЕЛЬ
ГОСТ
ГОД ВЫПУСКА
ЗАВОДСКОЙ №


КА 9586
576572
1979
8

ТЕХНИЧЕСКАЯ ХАРАКТЕРИСТИКА

НОМИНАЛЬНОЕ УСИЛИЕ
ХОД ПОЛЗУНА
ЧИСЛО ХОДОВ В МИНУТУ
НАИБОЛЬШЕЕ РАССТОЯ-
НИЕ МЕЖДУ СТОПОМ
И ПОЛЗУНОМ В ЕГО
НИЖНЕМ ПОЛОЖЕНИИ
РЕГУЛИРОВКА РАССТОЯ-
НИЯ МЕЖДУ СТОПОМ
И ПОЛЗУНОМ

400 Т
400 М
25
630 мм
160 мм

Trimming Press 400ton(KA9536)

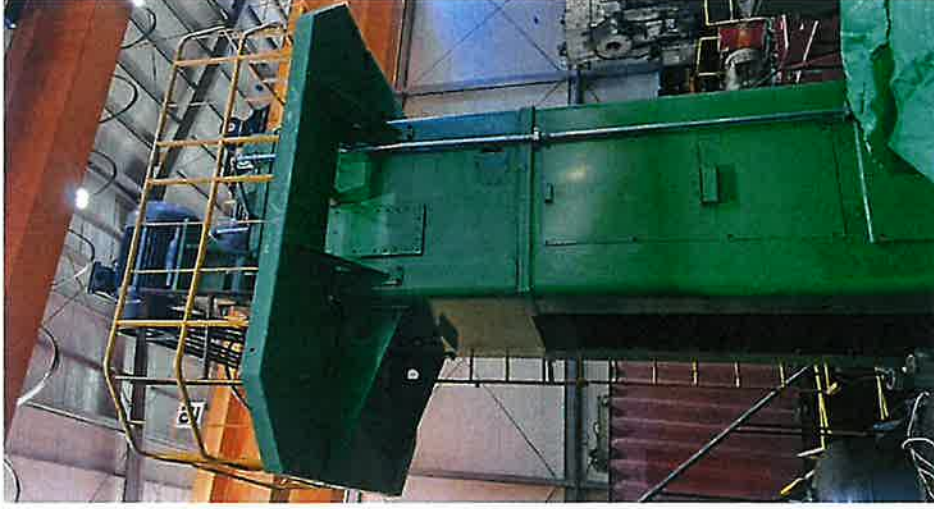

Trimming Press 400ton(KA9536)



VORONEZH KA 9536

